

FOR ALL PROJECTS

1. NEW CONSTRUCTION: CONTRACTOR SHALL FURNISH & INSTALL ALL ITEMS IN FIG. 11, EXCEPT BULLHEAD METER BOX. CONTRACTOR SHALL BACKFILL ITEMS FROM 1" QUARTER BEND COUPLING TO PROTECTOR CAP WITH SAND. CONTRACTOR SHALL INSTALL 2X4 STAKE AS SHOWN.

BUILDER/PLUMBER SHALL REMOVE ALL SAND OVER FITTINGS & FURNISH & INSTALL BULLHEAD METER BOX FROM CITY'S APPROVED MATERIALS LIST BEFORE REQUESTING METER INSTALLATION.


NO BULLHEADS ARE ALLOWED FOR NEW SINGLE FAMILY RESIDENTIAL CONSTRUCTION.

2. REHABILITATION: CONTRACTOR SHALL REPLACE EXISTING U-BRANCH & ALL METER FITTINGS, FURNISH & INSTALL 1" CURB STOP & CONNECT TO CUSTOMER'S SERVICE. CONTRACTOR SHALL FURNISH & INSTALL BULLHEAD METER BOX FROM CITY'S APPROVED MATERIALS LIST.

NOTES:

1. ALL COPPER FITTINGS SHALL BE COMPRESSION FITTINGS.
2. FOR NEW CONSTRUCTION FURNISH AND INSTALL ALL CURB STOPS, U-BRANCHES, SPACERS, COUPLINGS, ETC., TO CONFORM TO FIGURE 10. SPACERS, COUPLINGS, AND THREAD PROTECTOR CAPS ARE NOT REQUIRED FOR EXISTING INSTALLATIONS.
3. 1" CURB STOP OUTSIDE OF METER BOX AND CITY APPROVED "U" BRANCH ARE REQUIRED FOR REHABILITATION OF EXISTING INSTALLATIONS AND FOR NEW CONSTRUCTION. VERIFY WITH CITY.
4. METERS SHALL NOT BE INSTALLED IN EXISTING OR PROPOSED SIDEWALKS OR WITHIN 3' OF DRIVEWAYS OR CURBS.
5. METERS & TAPS SHALL BE LOCATED ON THE SAME SIDE OF THE MAIN.
6. STAMPING OR ETCHING NOT PERMITTED WITHIN THE ENTERTAINMENT DISTRICT. BENCHMARK MEDALLION MAY BE REQUIRED IN LIEU OF STAMPING OR ETCHING.

ELEVATION
NOT TO SCALE

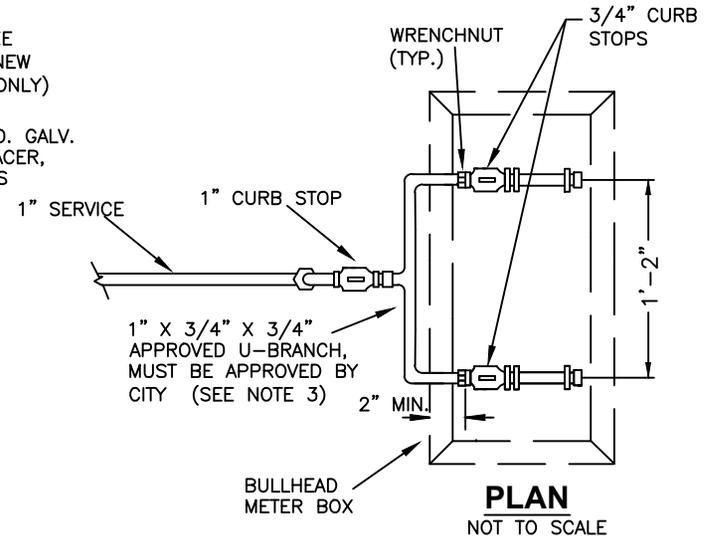

BULLHEADS ARE NOT ALLOWED FOR NEW SINGLE FAMILY DETACHED RESIDENTIAL CONSTRUCTION.

FIGURE 11

REHABILITATION OF EXISTING AND CONSTRUCTION OF BULLHEAD INSTALLATIONS

ARLINGTON WATER UTILITIES